

# EASIRAIL: FLOOR TO FLOOR HANDRAIL KITS 1 - 3 STEPS

## Freestanding handrail kits

Our floor to floor handrail kits are available to suit standard steps, ranging from one to three treads.

They are available in either Green or Black as standard with marine grade stainless steel connectors, providing the ideal solution where support is required at a stepped access point.

Our posts are fully galvanised and powder coated ensuring they will remain free from corrosion for many years to come and giving us the confidence to offer a 10 year warranty.

Designed for use with a high strength glue, eliminating the need for specialist tools, they are quick and easy to install. If you are in an environment where you require a more permanent fix, you can also rivet the connectors in to position. Please call us to discuss.


All items (and many more) are also available as individual components - you can fully customise your handrail solution to suit your requirements. For more details on our Easirail handrail system, please contact us.

\*N.B. No floor fixings are supplied with our kits owing to the multitude of surfaces the handrail may be secured to. You can purchase these from your local hardware store who will be able to advise.



## Installation

- We suggest you 'dry' fix the handrail in to position as illustrated below, to determine the correct fixing points at the ground - should a connector be difficult to insert, you may need to file off any seam inside the tube. They are designed to be a very tight fit.
- You may need to 'pack' underneath the base plate to ensure the posts sit vertical - large metal washers are good for this purpose.
- Rotate the posts as required to miss joints or to move further away or closer to an edge as required.
- Mark the fixing points, remove the posts, then drill, plug and secure the posts with your choice of fixings\*.
- Using the glue, place a generous bead inside the open edge of both posts and the handrail before introducing the stainless steel connectors.
- Rotate the connectors when inserting in to the posts and handrail to ensure good coverage of the glue - we recommend that you insert the DCON first, followed by the handrail tube, and ending with the UCON.
- Leave undisturbed for 24 hours to fully cure before use.

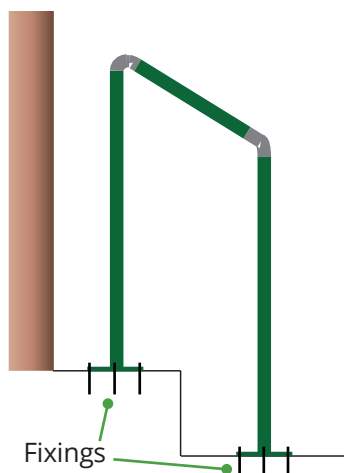

10  
YEAR  
WARRANTY

### Easiaccess Limited

Liberty House  
Federation Way  
Lancaster Road, Dunston  
Tyne and Wear, NE11 9JR

**FREEPHONE: 0800 321 7430**

E: [info@easiaccess.co.uk](mailto:info@easiaccess.co.uk)

[www.easiaccess.co.uk](http://www.easiaccess.co.uk)